

Transceiver, 74ACT245, 4.5 V to 5.5 V, TSSOP-20

Manufacturers	ON Semiconductor, LLC
Package/Case	TSSOP-20
Product Type	Logic ICs
RoHS	Rohs
Lifecycle	



Images are for reference only

Please submit RFQ for 74ACT245MTC or [Email to us: sales@ovaga.com](mailto:sales@ovaga.com) We will contact you in 12 hours.


[RFQ](#)

General Description

The AC/ACT245 contains eight non-inverting bidirectional buffers with 3-STATE outputs and is intended for bus-oriented applications. Current sinking capability is 24 mA at both the A and B ports. The Transmit/Receive (T/R#) input determines the direction of data flow through the bidirectional transceiver. Transmit (active-HIGH) enables data from A ports to B ports; Receive (active-LOW) enables data from B ports to A ports. The Output Enable input, when HIGH, disables both A and B ports by placing them in a HIGH Z condition.

Application

ONSEMI

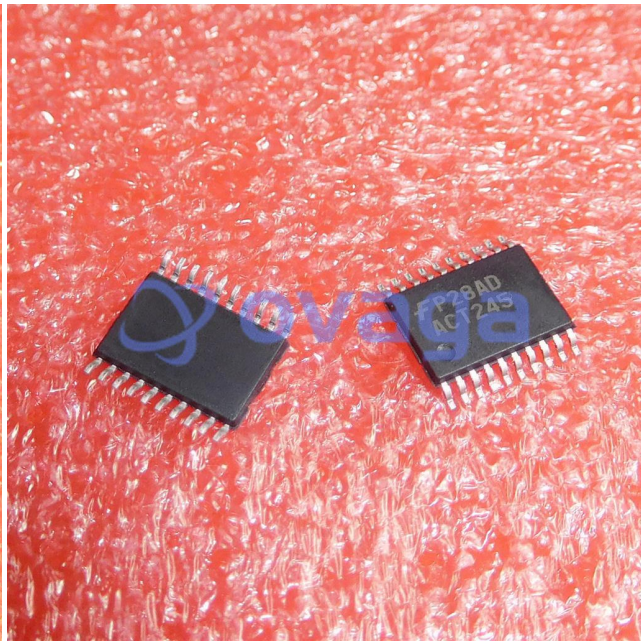

Related Products



[MM74HC14MX](#)

ON Semiconductor, LLC
SOIC-14



[74ACT00SC](#)

ON Semiconductor, LLC
SOIC-14



[74VHC74MTC](#)

ON Semiconductor, LLC
TSSOP-14



[74LVTH244MTC](#)

ON Semiconductor, LLC
TSSOP-20



[74LCX541MTCX](#)

ON Semiconductor, LLC
TSSOP-20



[MM74HC595MTCX](#)

ON Semiconductor, LLC
TSSOP-16



[MC74VHCT50ADTR2G](#)

ON Semiconductor, LLC
TSSOP-14



[74LCX125BQX](#)

ON Semiconductor, LLC
DQFN-14