


3.0V to 5.5V, Low-Power, up to 1Mbps, True RS-232 Transceivers Using Four 0.1 μ F External Capacitors, RS-232 Interface IC IC TXRX RS-232 LP

Manufacturers	Analog Devices, Inc
Package/Case	SO-16
Product Type	Interface ICs
RoHS	Rohs
Lifecycle	

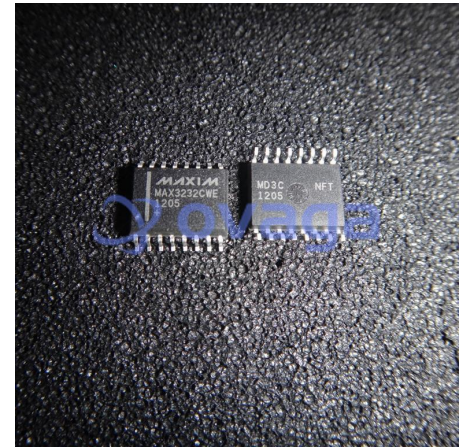

Images are for reference only

Please submit RFQ for MAX3232CWE+ or [Email to us: sales@ovaga.com](mailto:sales@ovaga.com) We will contact you in 12 hours.

[RFQ](#)

General Description

MAX3232CWE+ is a type of RS-232 transceiver integrated circuit (IC) manufactured by Maxim Integrated. It is a high-speed, low-power device that can be used to convert signals between RS-232 and TTL/CMOS voltage levels.

Features

- Two RS-232 transceivers in one package
- Maximum data rate of 250 kbps
- 1 μ A low-power shutdown mode
- Supports 3V to 5.5V supply voltage
- ESD protection for RS-232 I/O pins

Application

- Communication between RS-232 and TTL/CMOS devices
- Industrial automation
- Networking equipment
- Test and measurement equipment
- Point-of-sale terminals
- Data acquisition systems




Related Products



[MAX3232EEUE](#)
Analog Devices, Inc
TSSOP-16



[MAX4544EUT+T](#)
Analog Devices, Inc
SOT-23-6



[MAX202CSE](#)
Analog Devices, Inc
SOP-16



[MAX485ECPA](#)
Analog Devices, Inc
DIP-8



[MAX3221EEUE](#)
Analog Devices, Inc
TSSOP-16



[MAX3232EEUE](#)
Analog Devices, Inc
TSSOP-16

[MAX490MJA](#)



Analog Devices, Inc
CDIP-8

[MAX3232EUE](#)



Analog Devices, Inc
TSSOP-16