

3.0V to 5.5V, Low-Power, up to 1Mbps, True RS-232 Transceivers Using Four 0.1 μ F External Capacitors

Manufacturers	Analog Devices, Inc
Package/Case	TSSOP-16
Product Type	Interface ICs
RoHS	
Lifecycle	



Images are for reference only

Please submit RFQ for MAX3232CUE+T or [Email to us: sales@ovaga.com](mailto:sales@ovaga.com) We will contact you in 12 hours.

[RFQ](#)

General Description


MAX3232CUE+T is a type of integrated circuit (IC) manufactured by Maxim Integrated. It is a low-power, RS-232 transceiver that operates with 3.0V to 5.5V supply voltage range.

Features

- Supports 250kbps data rate
- ESD Protection for RS-232 I/O pins
- Compatible with TIA/EIA-232-F and ITU v.28 standards
- Automatic power-down function when no signal is detected

Application

- Industrial control systems
- Handheld devices
- Data acquisition systems
- Network hubs and switches

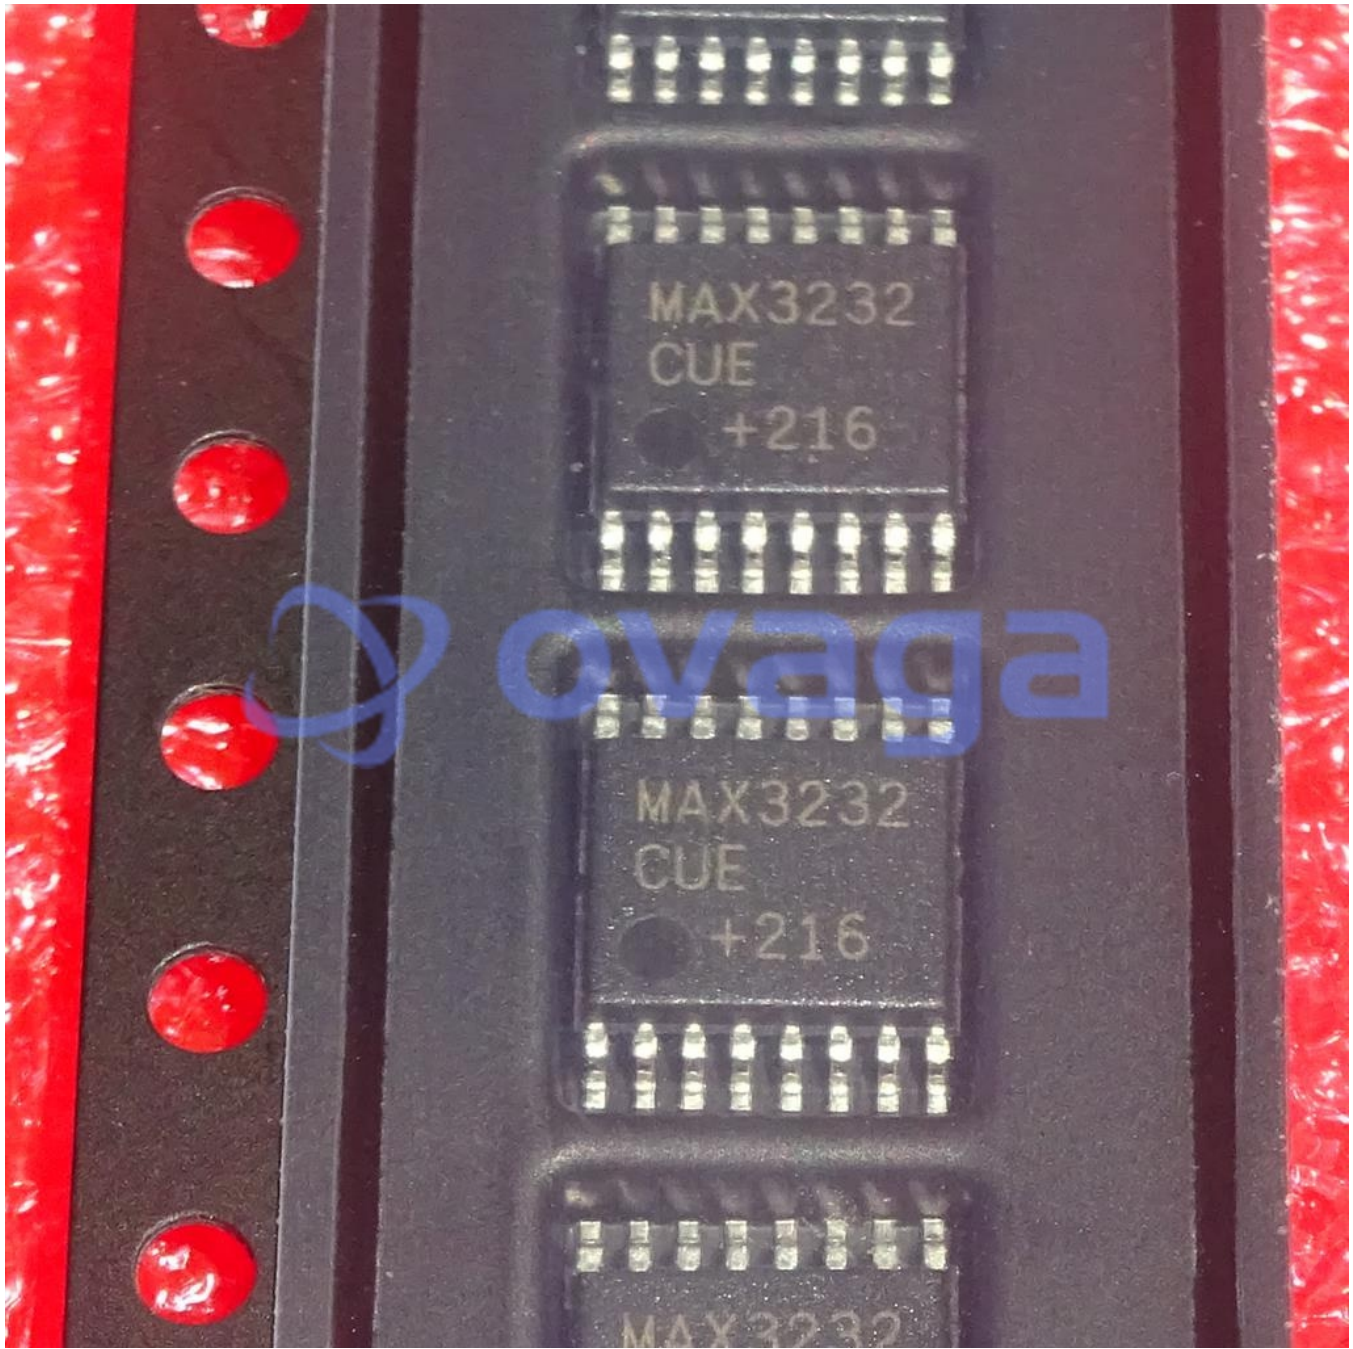

Related Products




[MAX3232EEUE](#)

Analog Devices, Inc
TSSOP-16



[MAX4544EUT+T](#)

Analog Devices, Inc
SOT-23-6



[MAX202CSE](#)

Analog Devices, Inc
SOP-16




[MAX485ECPA](#)

Analog Devices, Inc
DIP-8



[MAX3221EEUE](#)

Analog Devices, Inc
TSSOP-16



[MAX3223EEUE](#)

Analog Devices, Inc
TSSOP-16



[MAX490MJA](#)

Analog Devices, Inc
CDIP-8



[MAX3232EUE](#)

Analog Devices, Inc
TSSOP-16