

# LTC6090CS8E-5#PBF

TOP VIEW

Data Sheet

Circuit Breaker Magnetic 1Pole 2A 250VAC/415VAC/240VAC 2Pin

Manufacturers	Analog Devices, Inc	COM 1 -IN 2 4IN 3 V 4 V 4 V 4
Package/Case	SOP-8	SBE PACKAGE 8-LEAD PLASTIC SO T <sub>JMAC</sub> = 150°C, 0 <sub>JC</sub> = 5°CW EXPOSED PAD (PIN 9) IS V <sup>-</sup> , MUST BE SOLDERED TO PCB
Product Type	Amplifier ICs Images are for refere	
		Images are for reference only
RoHS	Pb-free Halide free	
Lifecycle		

Please submit RFQ for LTC6090CS8E-5#PBF or <u>Email to us: sales@ovaga.com</u> We will contact you in 12 hours.

<u>RFO</u>

# **General Description**

The LTC6090/LTC6090-5 are high voltage, precision monolithic operational amplifiers. The LTC6090 is unity gain stable. The LTC6090-5 is stable in noise gain configurations of 5 or greater. Both amplifiers feature high open loop gain, low input referred offset voltage and noise, and pA input bias current and are ideal for high voltage, high impedance buffering and/or high gain configurations.

The amplifiers are internally protected against overtemperature conditions. A thermal warning output, TFLAG, goes active when the die temperature approaches 150°C. The output stage may be turned off with the output disable pin OD. By tying the OD pin to the thermal warning output (TFLAG), the part will disable the output stage when it is out of the safe operating area. These pins easily interface to any logic family.

Both amplifiers may be run from a single 140V or spit  $\pm$ 70V power supplies and are capable of driving up to 200pF of load capacitance. They are available in either an 8-lead SO or 16-lead TSSOP package with exposed pad for low thermal resistance.

# Features

Supply Range:  $\pm 4.75$ V to  $\pm 70$ V (140V)

0.1 Hz to 10 Hz Noise:  $3.5 \mu\text{VP-P}$ 

Input Bias Current: 50pA Maximum

Low Offset Voltage: 1.25mV Maximum

Low Offset Drift:  $\pm 5\mu V/^{\circ}C$  Maximum

CMRR: 130dB Minimum

Rail-to-Rail Output Stage

Output Sink and Source: 50mA


12MHz Gain Bandwidth Product

21V/µs Slew Rate

11nV/\/Hz Noise Density

Thermal Shutdown

Available in Thermally Enhanced SOIC-8E or TSSOP-16E Packages



# Application


ATE

Piezo Drivers

Photodiode Amplifier

High Voltage Regulators

Optical Networking

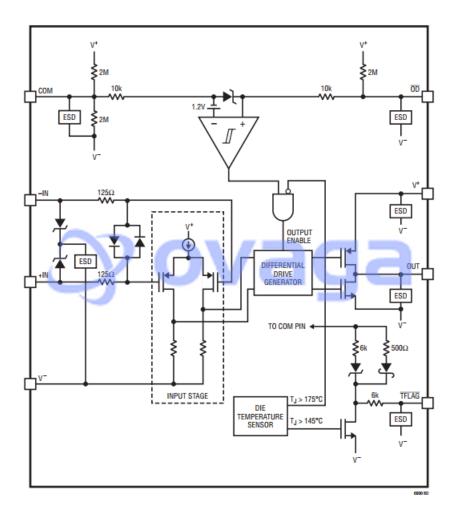

### **Related Products**



Analog Devices, Inc SOIC-16

LTC2053CMS8

Analog Devices, Inc

LTC1151CSW#PBF







Analog Devices, Inc SOP14



LTC1150CS8 Analog Devices, Inc SOP8





Analog Devices, Inc SOP-8

### LTC1150CN8

Analog Devices, Inc DIP8





LT6105IMS8

Analog Devices, Inc MSOP-8

## LT1013CN8

Analog Devices, Inc DIP-8